

Designing and Making the Worlds Best Torque Instruments Since 1960











S. HIMMELSTEIN AND COMPANY








Himmelstein Precision Torquemeters

Non-Contact Rotating and Reaction Types

DIGITAL

Digital Rotating Torque Sensors	Compact	Ultra-Precision Digital				Bearingless Digital		
	2X Overload	2X Overload	4X Overload	10X Overload	Dual Range	2X Overload	4X Overload	Dual Range
								
MCRT® Series	48200V	48800V	49800V	59800V	79800V	84000V/86000V	85000V/87000V	84700V/88700V
Range (lbf-in)	25 to 10,000	25 to 375,000	50 to 190,000	40 to 75,000	40 to 375,000	500 to 4,000,000	250 to 2,000,000	500 to 4,000,000
Range (N-m)	2.83 to 1,130	2.82 to 42,400	5.65 to 21,500	4.52 to 8,480	4.52 to 42,400	56.5 to 452,000	28.3 to 226,000	56.5 to 452,000
Mechanical Overload ¹	200%	200%	400%	1,000%	200%, 1,000%	200%	400%	200%, 1,000% & 2,000%
Overrange	130%	150%	150% to 300%	150%	150%	150%	150% or 300%	150% or 300%
Speed (rpm) ^{2,12}	0 to 15,000	0 to 15,000	0 to 15,000	0 to 15,000	0 to 15,000	0 to 15,000	0 to 15,000	0 to 15,000
Accuracy (%) ³	0.2 & 0.15	0.04 & 0.02	0.04 & 0.02	0.03	0.03 & 0.05	0.04, 0.02 & 0.01 ¹⁴	0.04, 0.02 & 0.01 ¹⁴	0.04, 0.02 & 0.01 ¹⁴
Noise Hardening ⁴	standard	standard	standard	standard	standard	standard	standard	standard
Torque Output	±5 or ±10 Vdc & RS232	±5 or ±10 Vdc, & RS232/422/485	±5 or ±10 Vdc, & RS232/422/485	±5 or ±10 Vdc, & RS232/422/485	±5 or ±10 Vdc, & RS232/422/485	±5 or ±10 Vdc, FM, & RS232/485	±5 or ±10 Vdc, FM, & RS232/485	±5 or ±10 Vdc, FM, & RS232/485
Speed Output	60 ppr					30/45/60 ppr	30/45/60 ppr	30/45/60 ppr
Power Output	N/A					N/A	N/A	N/A
Filter Selections	11 from 0.1 to 200 Hz	13 from 0.1 to 1,000 Hz	13 from 0.1 to 1,000 Hz	13 from 0.1 to 1,000 Hz	13 from 0.1 to 1,000 Hz	13 from 0.1 to 1,000 Hz	13 from 0.1 to 1,000 Hz	13 from 0.1 to 1,000 Hz
Cal Signal	Remotely Operated	Remotely Operated	Remotely Operated	Remotely Operated	Remotely Operated	Remotely Operated	Remotely Operated	Remotely Operated
Zero & Span	Automatic by processor	Automatic by processor	Automatic by processor	Automatic by processor	Automatic by processor	Automatic by processor	Automatic by processor	Automatic by processor
Input Power	10 to 15 Vdc	10 to 26 Vdc @ 2.7 Watts	10 to 26 Vdc@ 2.7 Watts	10 to 26 Vdc @ 2.7 Watts	10 to 26 Vdc @ 2.7 Watts	10 to 26 Vdc @ 6 to 11 Watts	10 to 26 Vdc @ 6 to 11 Watts	10 to 26 Vdc @ 6 to 11 Watts
Mechanical Style(s)	Shaft	Shaft	Shaft	Shaft	Shaft	Very Short Disk	Very Short Disk	Very Short Disk
Compatible Display(s)	703 or 723	703 or 733	703 or 733	703 or 733	703 or 733	703 or 723	703 or 723	703 or 723
Specification Sheet	7410	7409	7409	7509	7511	8701 & 8703	8701 & 8703	8707 & 8801

ANALOG

Rotating Torque Sensors - Analog Output	mV/V Output		4-20 mA Output	DC Operated ±5 or ±10 volt Output			
							
MCRT® Series	28000T	29000T	39000X	48000V	49000V	59000V	79000V
Range (lbf-in)	0.625 to 4,000,000	0.625 to 2,000,000	25 to 2,000,000	0.625 to 4,000,000	0.625 to 2,000,000	40 to 735,000	40 to 4,000,000
Range (N-m)	0.071 to 452,000	0.071 to 226,000	2.83 to 226,000	0.071 to 452,000	0.071 to 226,000	4.52 to 83,000	4.52 to 452,000
Mechanical Overload ¹	200%	400%	400%	200%	400%	1,000%	200%
Overrange	ext amplifier dependent	ext amplifier dependent	125%	133%	133%	133%	133%
Speed (rpm) ^{2,12}	0 to 15,000	0 to 15,000	0 to 15,000	0 to 15,000	0 to 15,000	0 to 15,000	0 to 15,000
Accuracy (%) ³	0.05 & 0.1	0.05 & 0.1	0.05 & 0.1	0.05 & 0.1	0.05 & 0.1	0.07	0.1
Noise Hardening ⁴	standard	standard	standard	standard	standard	standard	standard
Torque Output	1.5 mV/V	1.5 mV/V	4-20 mA or 12±8 mA	±5 Vdc ⁵ or ±10 Vdc ⁶	±5 Vdc ⁵ or ±10 Vdc ⁶	±5 Vdc ⁵ or ±10 Vdc ⁶	±5 Vdc ⁵ or ±10 Vdc ⁶
Speed Output	60 ppr	60 ppr	60 ppr	60 ppr	60 ppr	60 ppr	60 ppr
Bandwidth (Hz)	ext amplifier dependent	ext amplifier dependent	1Hz & 200Hz	1 Hz & 500 Hz ⁷ or 1,100 Hz ⁸	1 Hz & 500 Hz ⁷ or 1,100 Hz ⁸	1 Hz & 500 Hz ⁷ or 1,100 Hz ⁸	1 Hz & 500 Hz ^{7,9} or 1,100 Hz ^{8,9}
Cal Signal	ext amplifier dependent	ext amplifier dependent	Internal Switch	Remotely Operated	Remotely Operated	Remotely Operated	Remotely Operated
Zero & Span	ext amplifier dependent	ext amplifier dependent	Internal Controls	Internal Controls	Internal Controls	Internal Controls	Internal Controls
Input Power	3 to 6 Vrms @ 3 kHz ¹⁰	3 to 6 Vrms @ 3 kHz ¹⁰	10 to 28 Vdc	10.5 to 24 Vdc ¹¹	10.5 to 24 Vdc ¹¹	10.5 to 24 Vdc ¹¹	10.5 to 24 Vdc ¹¹
Mechanical Style(s)	Shaft Ends or Flange Ends	Shaft Ends or Flange Ends	Shaft Ends or Flange Ends	Shaft Ends or Flange Ends	Shaft Ends or Flange Ends	Shaft Ends or Flange Ends	Shaft Ends or Flange Ends
Compatible Display(s)	701 & 721	701 & 721	706 & 726	703 & 723	703 & 723	703 & 723	703 & 723
Specification Sheet	761 & 716	709 & 716	7300	7401 & 7402	7400 & 7402	7590	7700

INSTRUMENTS










The Model 700 Series of Signal Conditioning Instruments are designed for measurement, display, and readout of mechanical and fluid power. Each is a fully-featured Data Acquisition system with Test Control capabilities. Each handles up to two hardware channels and one calculated channel.









- The 16 character by 2 line alphanumeric display provides easy to read menu selections.
- All manual adjustments have been eliminated. Calibration is performed automatically.
- Resolution is not compromised because there are no ranges to select. Resolution is 0.01% for any Full Scale value.
- Simplified keypad allows access to all channels, data types, and status without stopping a Test. Data is displayed in engineering units.
- There is no battery to change. System settings are stored in EEPROM memory.
- There is no filter to change or fan to replace.

- ▲ **0.625 to 4,000,000 lbf-in (0.071 Nm to 452 kNm)**
- ▲ **0.01% Accuracy, Accredited* Bi-directional Calibration**
- ▲ **Industries Highest Overload and Overrange Ratings**
- ▲ **Best Noise Immunity and Temperature Compensation**

SPECIAL PURPOSE

Special Purpose Rotating Torque Sensors	Spline Drive per AND		Pulley	Automotive Torque Wheels		Horsepower/kWh Meters	
							
MCRT® Series	28550T	48550V	31200T	27800T	27800V	48000P	49000P
Range (lbf-in)	50 to 10,000	50 to 10,000	50 to 1,500	250 to 100,000	250 to 100,000	25 to 4,000,000	25 to 2,000,000
Range (N-m)	5.65 to 1,130	5.65 to 1,130	5.65 to 170	28.3 to 11,300	28.3 to 11,300	2.83 to 452,000	2.83 to 226,000
Mechanical Overload ¹	200%	200%	250%	200% & 1,000%	200% & 1,000%	200%	400%
Overrange	ext amplifier dependent	133%	ext amplifier dependent	ext amplifier dependent	133%	150%	150%
Speed (rpm) ^{2,12}	0 to 15,000	0 to 15,000	0 to 7,500	0 to 2,000	0 to 2,000	0 to 15,000	0 to 15,000
Accuracy (%) ³	0.1	0.15	0.1 & 0.25	0.1	0.15	0.1 & 0.05	0.1 & 0.05
Noise Hardening ⁴	standard	standard	standard	standard	standard	standard	standard
Speed Output	1.5 mV/V	±5 Vdc ⁵ or ±10 Vdc ⁶	4 mV/V	4 mV/V	±5 Vdc ⁵ or ±10 Vdc ⁶	±5 or ±10 Vdc & RS232	±5 or ±10 Vdc & RS232
Speed Output	60 ppr	60 ppr	60 ppr	60 or 3,600 ppr	60 or 3,600 ppr	±5 or ±10 Vdc & RS232	±5 or ±10 Vdc & RS232
Power Output	N/A	N/A	N/A	N/A	N/A	±5 or ±10 Vdc & RS232	±5 or ±10 Vdc & RS232
Energy Output	N/A	N/A	N/A	N/A	N/A	±5 or ±10 Vdc & RS232	±5 or ±10 Vdc & RS232
Filter Selections	ext amplifier dependent	1Hz & 500Hz	ext amplifier dependent	ext amplifier dependent	1Hz & 500Hz ^{7,8}	11 from 0.1 to 200 Hz	11 from 0.1 to 200 Hz
Cal Signal	ext amplifier dependent	Remotely Operated	ext amplifier dependent	ext amplifier dependent	Remotely Operated	Remotely Operated	Remotely Operated
Zero & Span	ext amplifier dependent	Internal Controls	ext amplifier dependent	ext amplifier dependent	Internal Controls	automatic by processor	automatic by processor
Input Power	3 to 6 Vrms @ 3 kHz ¹⁰	10.5 to 24 Vdc ¹¹	3 to 6 Vrms @ 3 kHz ¹⁰	3 to 6 Vrms @ 3 kHz ¹⁰	10.5 to 24 Vdc ¹¹	11 to 24 Vdc	11 to 24 Vdc
Mechanical Style(s)	AND Flange & Spline	AND Flange & Spline	Pulley	Automotive Wheel	Automotive Wheel	Shaft Ends or Flange Ends	Shaft Ends or Flange Ends
Compatible Display(s)	701 & 721	703 & 723	701 & 721	701 & 721	703 & 723	703 & 733	703 & 733
Specification Sheet	765	7403	7820	7800	7801 & 7800	7404	7404

REACTION

Reaction (Static) Torque Transducers	Hollow Flanged		C-Face	Solid Flanged			Transfer Standard	Square Drive	
	2X Overload	2X Overload	5X Overload	2X Overload	2X Overload	2X Overload	Digital	2X Overload	
									
	RTM Series	2000	2080/2090	CF2800V	2200M	2206/2207	2270V/ 2280V	2300DV	2208/2209
	Range (lbf-in)	60 to 100,000	200,000 to 2,400,000	50 to 20,000	0.625 to 100,000	300,000 to 750,000	10 to 750,000	500 to 100,000	300,000 to 4,000,000
	Range (N-m)	6.78 to 11,300	22,600 to 271,000	5.65 to 2,260	0.071 to 11,300	33,900 to 84,700	11.3 to 84,700	56.5 to 11,300	33,900 to 452,000
	Mechanical Overload ¹	200%	200%	300%, 400% & 500%	200%	200%	200%	200%	200%
	Overrange	ext amplifier dependent	ext amplifier dependent	150%	ext amplifier dependent	ext amplifier dependent	150%	150%	ext amplifier dependent
	Accuracy (%) ³	0.1	0.1	0.1 & 0.05	0.1	0.1	0.1 & 0.05	0.04, 0.02 & 0.01	0.5
	Torque Output	1.5 mV/V	1.5 mV/V	±10 Vdc & RS232	2 mV/V	2 mV/V	±10 Vdc & RS232	±10 Vdc & RS232	3 mV/V
Bandwidth (Hz)	ext amplifier dependent	ext amplifier dependent	dc to 500 Hz	ext amplifier dependent	ext amplifier dependent	dc to 500 Hz	dc to 500 Hz	ext amplifier dependent	
Cal Signal	ext amplifier dependent	ext amplifier dependent	Remotely Operated	ext amplifier dependent	ext amplifier dependent	Remotely Operated	Remotely Operated	ext amplifier dependent	
Zero & Span	ext amplifier dependent	ext amplifier dependent	Automatic by processor	ext amplifier dependent	ext amplifier dependent	Automatic by processor	Automation by processor	ext amplifier dependent	
Input Power	10 V max, ac or dc	10 V max, ac or dc	10 to 26 Vdc	15 V max, ac or dc	15 V max, ac or dc	10 to 26 Vdc	10 to 26 Vdc	15 V max, ac or dc	
Mechanical Style	Hollow Flanged	Hollow Flanged	Hollow NEMA C-Face	Solid Flanged	Solid Flanged	Solid Flanged	Flanged	Square Drive	
Compatible Display	701 & 708	701 & 708	703	701 & 708	701 & 708	703	703	701 & 708	
Specification Sheet	770	779	7072	772	773	7721	775	778	

Notes

- Percentage of Full Scale Torque Rating. A few models vary; see the listed Specification Sheet for complete specifications, outline drawings, features and options by going to our website.
- Higher range units have lower maximum speed ratings. See listed Specification Sheet.
- The maximum error component, per referenced Specification Sheet, expressed as a percentage of full scale. Bidirectional NIST traceable calibrations are performed on all models in our accredited laboratory (NVLAP LAB code 200487-0). For more details visit the accreditation link: www.nist.gov.
- Hardened against electromagnetic interference (EMI) produced by IGBT based adjustable speed drives (ASD's) and magnetic fields from electric machinery; see Specification Sheet 708.
- Standard is dual 5V outputs both available simultaneously; one high frequency and one low frequency; see bandwidth column.
- Option L changes standard 5V outputs to 10V. See Note 11.
- Standard dual outputs are dc to 1 Hertz and dc to 500 Hertz.
- Option K converts the dc to 500 Hertz output to dc to 1,100 Hertz.
- MCRT® 79000V Torquemeters have four simultaneous outputs; a dual output for the Low Range and a dual output for the High Range.
- Requires a strain gage carrier amplifier with carrier frequency equal to 3 kHz ± 10% and well regulated voltage between 3 and 6 Vrms. Himmelstein Models 701, 711 or 721 are recommended.
- Standard units require unipolar power between 10.5 and 24 VDC. When equipped with Option L, sensor requires power between 18 and 24 VDC.
- Speed Pickups are optional on all models except the MCRT® 48000P & 49000P Series where they are standard along with on-board Speed and Power signal conditioning.
- MCRT® sensors use bonded strain gages, non-ferrite rotary transformers and high strength alloy steel torsion members, except ranges < 12.5 lbf-in use titanium shafts.
- For ranges greater than 100,000 lbf-in (11,300 Nm), available accuracies are 0.1 & 0.05.

A business built on company and product integrity.

Established in 1960, S. Himmelstein and Company makes the world’s best torque sensors, transfer standards, and instrumentation. Standard products include rotating and reaction sensors from 10 ozf-in (0.07 N-m) to 4,000,000 lbf-in (452 kN-m) in virtually every mechanical configuration. All employ state-of-the-art strain gage technology and are calibrated CW and CCW to full capacity in our ISO/IEC 17025.2005 accredited laboratory .

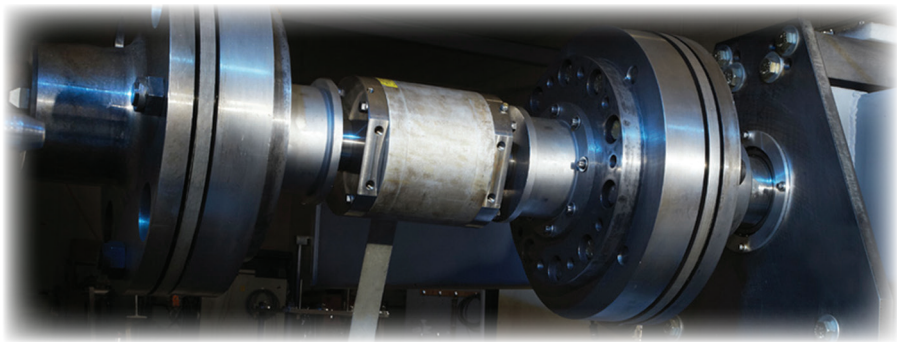
Accredited torque calibration services verify your units performance.

Confirm the accuracy of your existing transducers through Himmelstein’s expert Torque Calibration Services. All Himmelstein torquemeters and Systems are calibrated CW and CCW to their full capacity in our NVLAP ACCREDITED LABORATORY, Lab code 200487-0. (Visit www.himmelstein.com or, www.nist.gov for details)

Himmelstein will also recalibrate virtually any standard Torque Transducer or Torquemeter, US or foreign. Popular brands include Himmelstein, Lebow/Honeywell, PCB/Key, Sensor Data, Sensor Developments, HBM, Staiger-Mohilo, Kistler, Lorenz, Norbar, ETH, Datum, Futek, Magtrol and Manner.

In addition, you should consider registering your sensors on our secure website so that their calibration certificates are continously available to you as a reference.

To learn more, visit: www.calibratenow.com



S. HIMMELSTEIN AND COMPANY

Designing and Making the Worlds Best Torque Instruments Since 1960

2490 Pembroke Avenue, Hoffman Estates, Illinois 60169
Tel: 847/843-3300 • Fax: 847/843-8488

www.himmelstein.com